


AQW212S | PhotoMOS GU SOP 2 Form A



※Photo may vary from actual product.



Product Number	AQW212S
Part Number	AQW212S
Details	Surface-mount terminal, Tube packing style, Load voltage:60 V
Product name	PhotoMOS GU SOP 2 Form A
Features	Miniature SOP8-pin type of 60V/ 350V/ 400V load voltage

Spec Detail


As of November 06, 2019

Specifications and design of the products are subject to change without notice for the product improvement.

Item	Specifications
Product Number	AQW212S
Part Number	AQW212S
Product name	GU SOP 2 Form A
Type	GU
Package	SOP8
Voltage type	AC/DC
LED forward current [I_F]	50 mA
LED reverse voltage [V_R]	5 V
Peak forward current [I_{FP}]	1 A
Power dissipation [P_{in}]	75 mW
Load voltage [V_L]	60 V
Continuous load current [I_L]	0.4 A
Peak load current [I_{peak}]	1.5 A
Power dissipation [P_{out}]	600 mW
Total power dissipation [P_t]	650 mW
I/O isolation voltage [V_{iso}]	1,500 Vrms
Ambient temperature: Operating [T_{opr}]	-40 to +85°C -40 to +185°F
Ambient temperature: Storage [T_{stg}]	-40 to +100°C -40 to +212°F
LED operate current (Typical)	0.9 mA
LED operate current (Maximum)	3 mA
LED turn off current (Minimum)	0.4 mA
LED turn off current (Typical)	0.8 mA
LED dropout voltage (Typical) [V_F]	1.25 V

LED dropout voltage (Maximum) [V_F]	1.5 V
On resistance (Typical) [R_{on}]	0.83 ohm
ON resistance (Maximum) [R_{on}]	2.5 ohm
Off state leakage current (Maximum) [I_{Leak}]	1 μ A
Over current protection	Nothing
Turn on time (Typical)	0.65 ms
Turn on time (Maximum)	2 ms
Turn off time (Typical)	0.08 ms
Turn off time (Maximum)	0.2 ms
I/O capacitance (Typical) [C_{iso}]	0.8 pF
I/O capacitance (Maximum) [C_{iso}]	1.5 pF
Initial I/O isolation resistance (Minimum) [R_{iso}]	1,000 M ohm
[Recommended operating conditions] LED current [I_F]	Min.: 5 mA, Max.: 30 mA
[Recommended operating conditions] Load voltage [V_L]	Max.: 48 V
[Recommended operating conditions] Continuous load current [I_L]	Max.: 0.5 A (1ch), 0.4 A (2ch)
Terminal shape	Surface-mount terminal
Contact arrangement	2 Form A
Packing style	Tube packing style


External dimensions

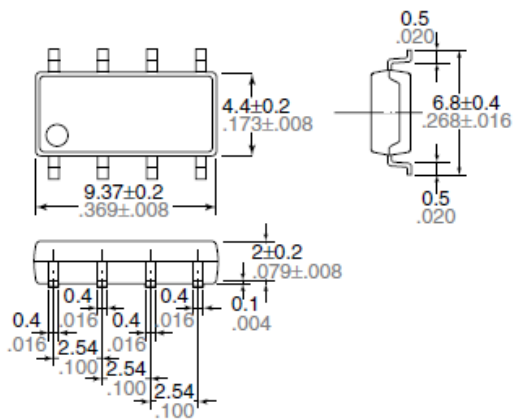

Terminal thickness = 0.15 .006
mm inch General tolerance: ±0.1 ±.004

Recommended mounting pad (Top view)

Recommended mounting pad (Top view)



mm inch Tolerance: ±0.1 ±.004

