


序号/RevNo.	名称/Title	文件编号/File No.
1	147F(3) 塑料件	QJ/XYT-11177
2	147F端子(短)	QJ/XYT-11179
3	147F端子(中)	QJ/XYT-11180
4	147F端子(长)	QJ/XYT-11181

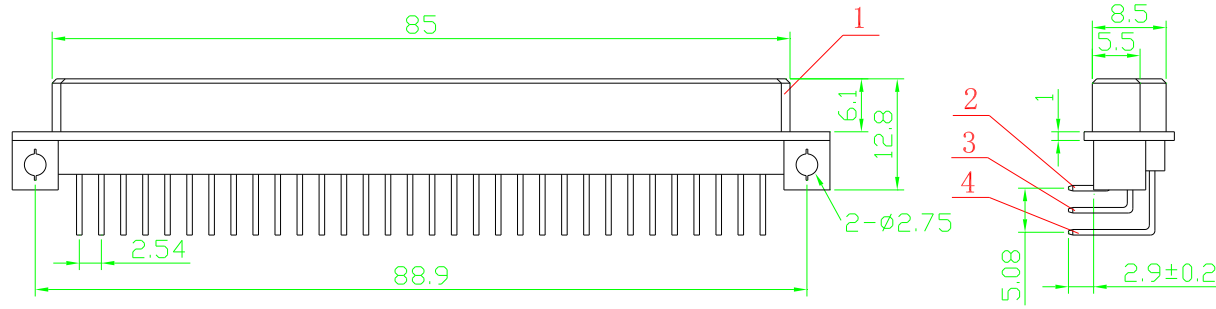


**Specifications:**

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 2AMP

**Dielectric Withstanding**

Voltage: AC 1000V For 1 minute  
 Operating Temperature:-55°C--+105°C  
 Contact: Phosphor Bronze  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

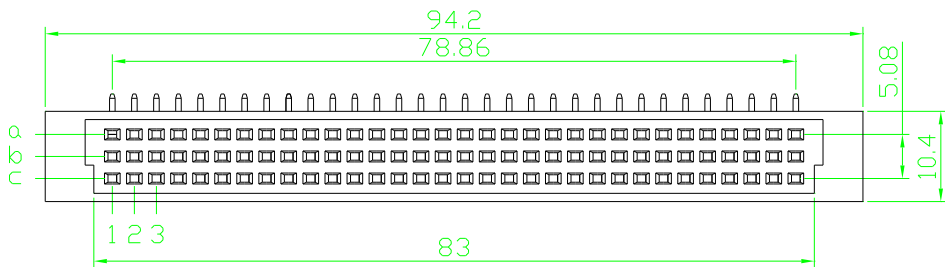


Pitch	Position	Rows with contacts
2.54mm	96	abc
	64	a-c
5.08mm	48	abc
	32	a-c

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2'
		图名/Title	文件编号/File No.	.x ±0.1	.x' ±1'
		147F(3) 产品图	QJ/XYT-12104	.xx ±0.05	.xx' ±0.5'
			页序/Sheet	.xxx ±0.01	
		备注/Remark		单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

序号/RevNo.	名称/Title	文件编号/File No.
1	147M(3) 塑料件	QJ/XYT-11183
2	147M端子	QJ/XYT-11182

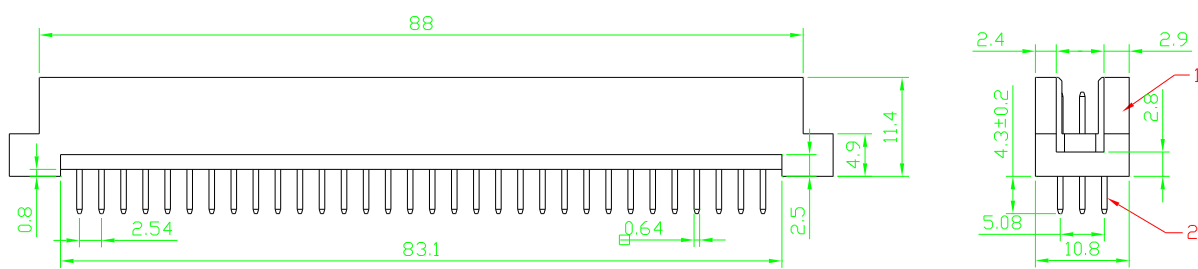


**Specifications:**

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 2AMP

**Dielectric Withstanding**

Voltage: AC 1000V For 1 minute  
 Operating Temperature:-55°C--+105°C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

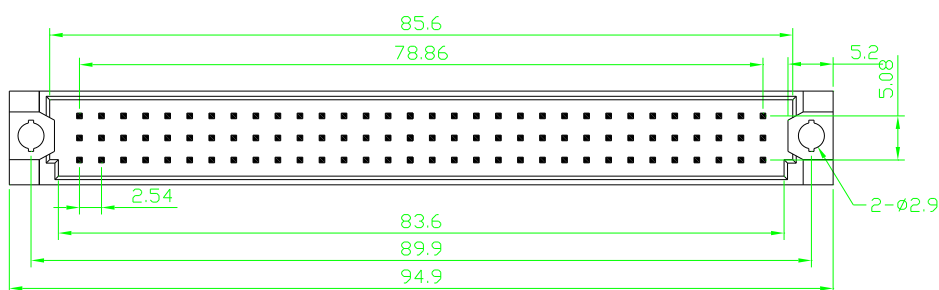

Pitch	Position	Rows with contacts
2.54mm	96	abc
	64	a-c
5.08mm	48	abc
	32	a-c

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2'
		图名/Title	文件编号/File No.	.x ±0.1	.x' ±1'
		147M(3) 产品图	QJ/XYT-12106	.xx ±0.05	.xx' ±0.5'
			页序/Sheet	.xxx ±0.01	
		备注/Remark		单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date