


Material: Nylon 6/6, UL 94V-2, White
 Available: 2~16P
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Withstand Voltage: 1000V AC/minute
 Contact Resistance: 20mΩ
 Insulation Resistance: 1000MΩ



Circuitis	Dim. A	Dim. B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

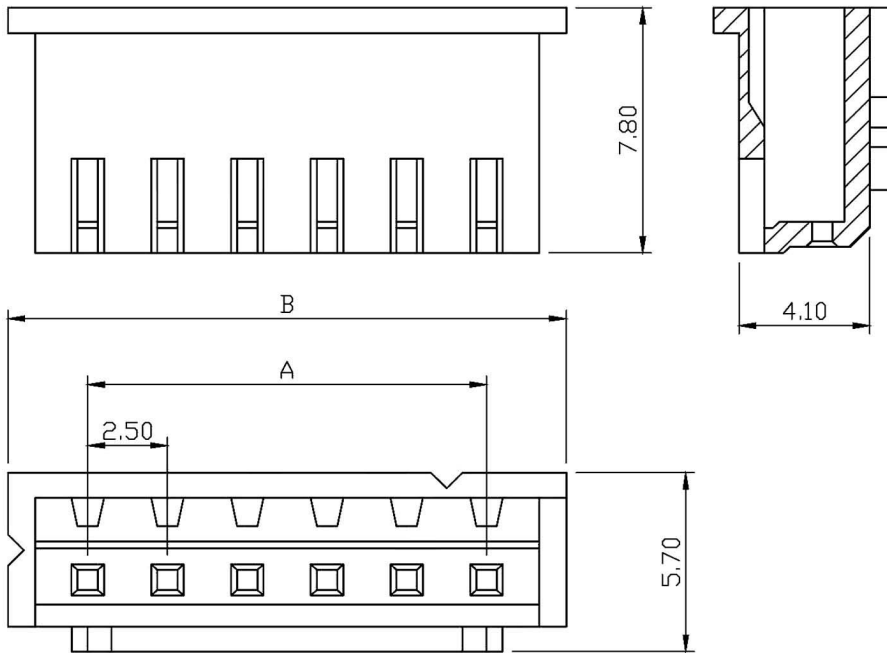

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DATE 制表日
2014/07/28

SCALE
比例 參考
UNIT
單位 M M
PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ± 0.30
.00 ± 0.20
ANG. ± 3°
SIZE.
紙張尺寸 A 4
REV.
版次 B

PART NAME 品名
XH2.50mm HOUSING 1XXXP
WHITE COLOR ROHS
PART NO.
料號 H7000-XXPW0000R