

Cable Gland Series

KLS8-0607-PG Germany Threaded Nylon Cable Gland Series


Material: made from UL Nylon 66, 94V-2 and tight ring from rubber.

Feature:

- 1.Special designation, good strength and none damage to electrical machine.
- 2.not need to dismetgrate the fix terminal, cable can be inserted throug directly then tighten easy and save time.

Application: used for machinery control box, distribution plate, machine and electrical, etc.

Unit:mm

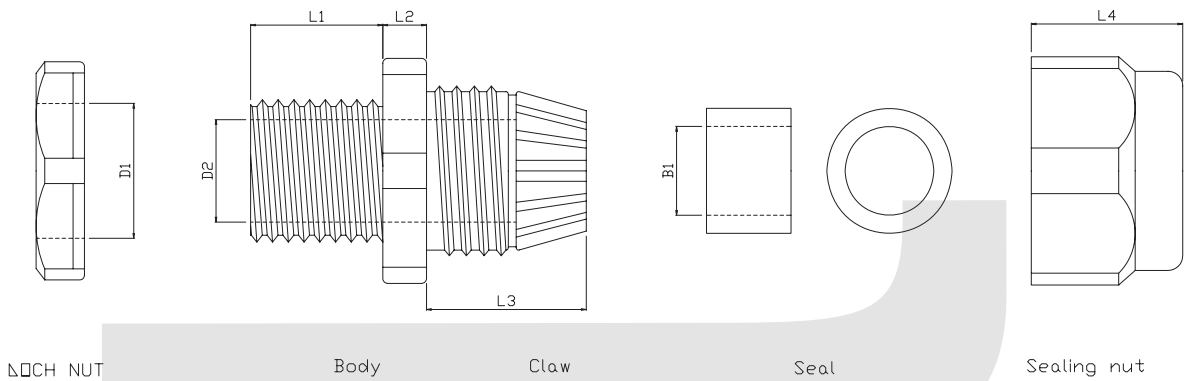

ITEM.NO.	D1	D2	L1	L2	L3	L4	B1	Cable range
PG-07	12.0	8.1	9.0	5.0	15.0	14.0	6.4	3.5-6
PG-09	16.0	11.0	9.0	5.0	15.0	16.0	8.6	4-8
PG-11	17.9	13.0	9.0	5.0	18.0	18.0	10.7	5-10
PG-13.5	20.2	15.0	9.0	5.0	20.0	19.0	13.3	6-12
PG-16	22.0	17.0	11.0	5.0	20.0	19.0	14.3	10-14
PG-19	24.0	19.0	11.0	5.0	22.0	21.0	15.5	12-15
PG-21	26.9	21.8	11.0	6.0	24.0	22.0	16.7	13-18
PG-24	29.8	24.0	13.0	7.0	24.0	24.0	19.2	15-22
PG-29	36.0	28.0	13.0	7.0	25.0	24.0	24.8	18-25
PG-36	45.7	39.0	15.0	8.0	32.0	27.0	30.7	22-32
PG-42	54.0	46.0	15.0	8.0	33.0	29.0	35.6	30-38
PG-48	59.0	51.0	16.0	8.0	36.0	30.0	41.4	34-44
PG-63	71.0	63.5	28.0	9.0	45.0	44.0	55.0	42-54

ORDER INFORMATION

KLS8-0607 - PG-07

