


300V 12A 2.5mm<sup>2</sup>

Poles: 2P/3P/4P/5P/6P/7P  
 8P/9P/10P/11P/12P/  
 13P/14P/15P/16P/17P  
 18P/19P/20P/21P/22P  
 23P/24P

Pitch: 5.0mm 5.08mm

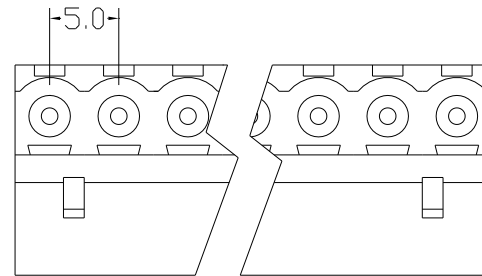

## Materials

Housing: Polyamide 6.6, Green  
 Clamp: Phosphor Bronze, 0.4t, Nickel Plated.  
 Wire Cage: Steel, 0.7t, Zinc Plated.  
 Screw: M2.5, Steel, Zinc Plated.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2°
				.x ±0.1	.x" ±1°
				.xx ±0.05	.xx" ±0.5°
				.xxx ±0.01	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.		
		XY2500F-A XY2500F-B			
		产品图	页序/Sheet		
		备注/Remark		单位/Units: mm	