

Specifications:

Contact Resistance: 2mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V

Rating Current: 2AMP


Rating Voltage: 30V AC

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Contact: Copper Alloy

Housing: Thermoplastic(UL 94V-0)

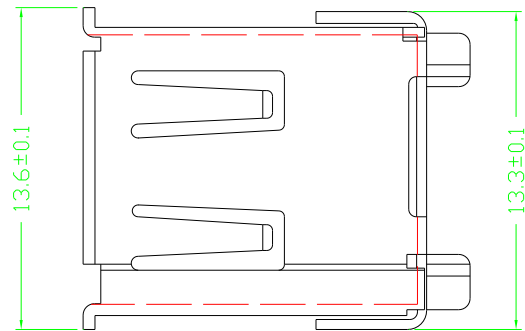

要求:

1. 铁壳无明显起皮、杂色、生锈, 断面毛边不超过0.05mm。
2. 端子无松动感, 且整排端子成一直线, 端子之间相互平行, 塑件无明显错位。
3. 铆合要紧密, 铁壳接合处无明显缝隙, 且铆合处平滑。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
		图名/Title	文件编号/File No.	.x ±0.1	.x' ±1°
		171-B产品图	QJ/XYT-12133	.xx ±0.05	.xx' ±0.5°
		备注/Remark	页序/Sheet	.xxx ±0.01	
				单位/Units: mm	